

RF Coaxial Termination: RF6-50JR20B

Description

RF6 Series RF coaxial termination



Technical Data

Electrical Data

Impedance	50 Ω
Interface frequency max.	DC~20GHz
VSWR	<1.20
Power capacity:	1 W
Voltage rating	500 V(rms)
Test voltage	1000 V(rms)
Contact resistance:	
Center conductor	$\leq 3\text{m } \Omega$
Out conductor	$\leq 2\text{m } \Omega$

Mechanical Data

Weight	3 g
Durability	500 Cycles

Environmental Data

Operating Temperature	-55 °C to 125 °C
-----------------------	------------------

Material Data

Piece Parts


	Material
Center contact	Beryllium copper
Body	Brass
Nut	Brass
Insulator	PTFE
Scatterer	Aluminium

Surface Plating(μm)

Gold 0.5 over nickle 2.0
Gold 0.2 over Nickel 2.0
Nickel 7.0 over copper 2.0
Black oxygenation

RF Coaxial Termination: RF6-50JR20B

Outline drawing

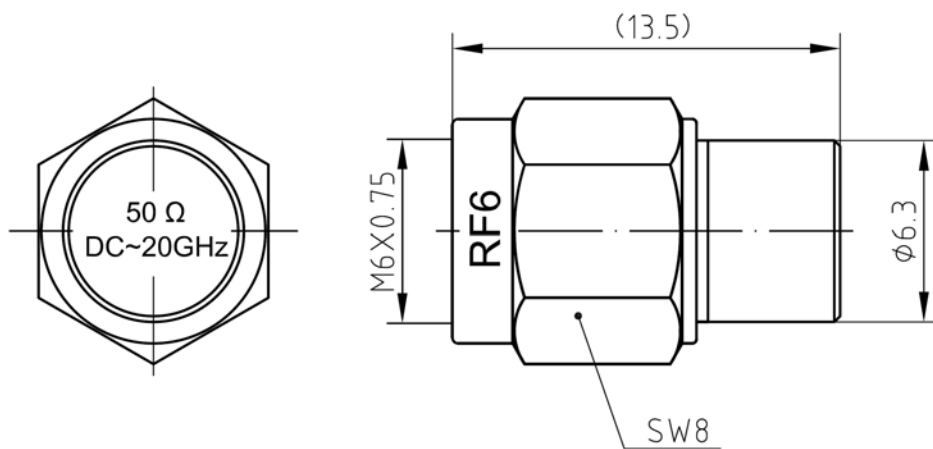

Packaging

Standard

Other

100/Box=10 Bag

Contact us