

RF Coaxial Attenuator: N 5watt 6dB 3G

(ATR-50NMF3-006-5)

Attenuator, N(male)- N(female), power 5 Watt, frequency 3 GHz , rejection 6 db

Technical Data

Electrical Data

Impedance	50Ω
Fr. Range	DC~3GHz
VSWR	1.22 max
Average Power	5 W
Peak Power	0.5 KW
Atten&Accuracy	6±0.5dB
Voltage rating	1000 V(rms)
Test voltage	1500 V(rms)
Contact resistance:	
Center conductor	≤1mΩ
Out conductor	≤0.2mΩ
Insulation resistance	≥5000MΩ

Mechanical Data

Connector Type:	N type
Weight:	80 g
Durability	500 Cycles


Environmental Data

Operating Temperature	-30 °C to +65 °C
-----------------------	------------------

Material Data


Piece Parts

	Material	
Body	Brass	White bronze 3.0 over copper 2.0
Center contact	Phosphor bronze	Silver 7.0 over copper 2.0
Scatterer	Aluminium	Passivated
Insulator	PTFE	

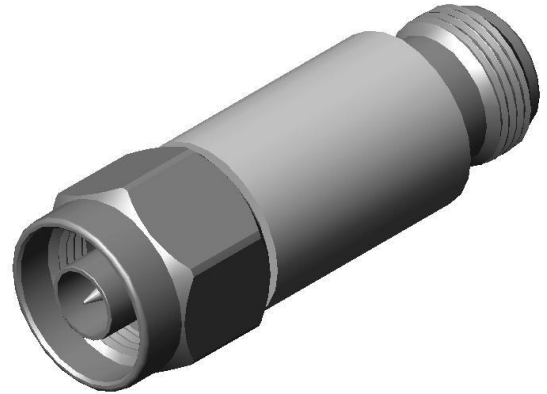

**RF Coaxial Attenuator: N 5watt 6dB 3G
(ATR-50NMF3-006-5)**

Outline drawing

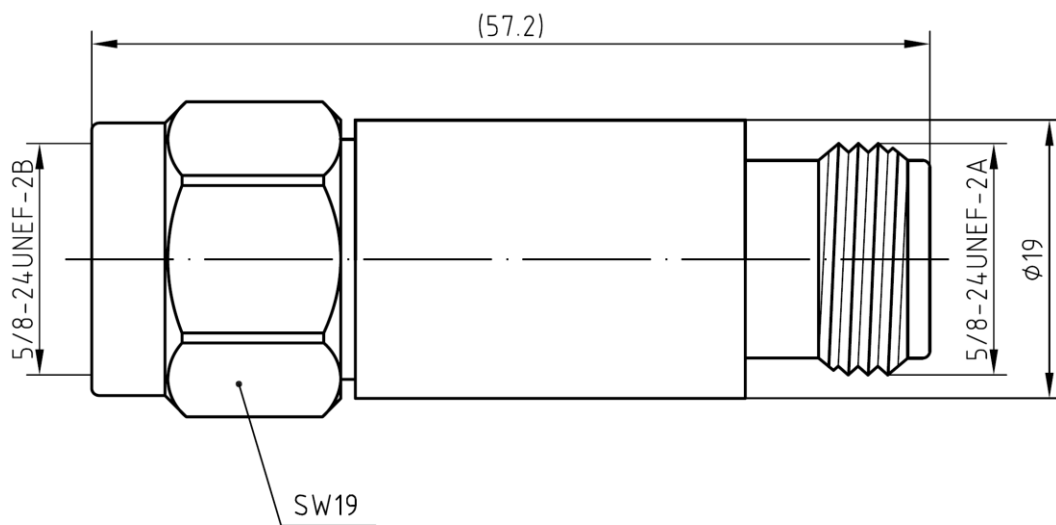

Packaging

Standard

25/Box=5 Bag

Other

Contact us