

## Coaxial Right Angle Connector: SSMA-JWB2GA

### Description

SSMA Right angle plug solder type cable .086

### Interface standards

MIL-C-39012

### Technical Data

#### Electrical Data

Impedance	50 $\Omega$
Interface frequency max.	18 GHz
VSWR	1.05+0.02 $\times$ f(GHz) max
Voltage rating	500 V(rms)
Test voltage	750 V(rms)
Contact resistance:	
Center conductor	$\leq 3\text{m } \Omega$
Out conductor	$\leq 2\text{m } \Omega$
Insulation resistance	$\geq 5000\text{M } \Omega$

#### Mechanical Data

Weight	4.0 g
Durability	500 Cycles

#### Environmental Data

Operating Temperature	-65 $^{\circ}\text{C}$ to 165 $^{\circ}\text{C}$
-----------------------	--

#### Material Data


##### Piece Parts

Center contact	Brass
Body	Brass
Coupling nut	Stainless steel
Gasket	Silicone Rubber
Insulator	PTFE

##### Material


##### Surface Plating( $\mu\text{m}$ )

Gold 0.5 over Nickel 2.0
Gold 0.2 over Nickel 2.0
Passivated

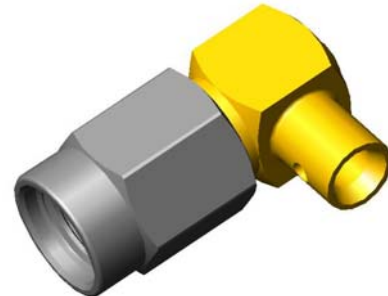

# Coaxial Right Angle Connector: SSMA-JWB2GA

## Outline drawing

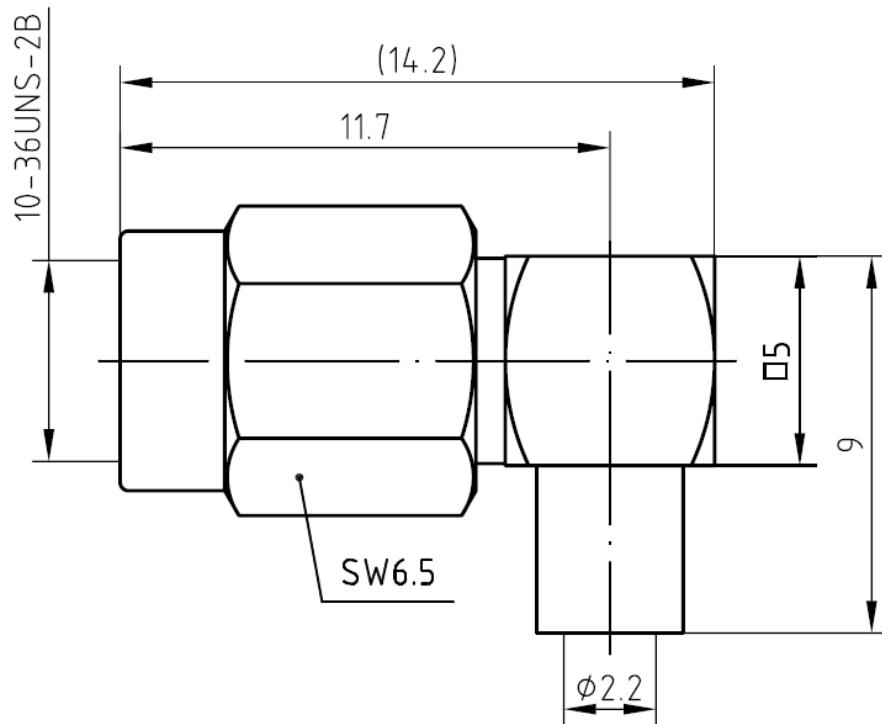

## Packaging

Standard

Other

150/Box=15 Bag

Contact us