

RF Coaxial Attenuator: N 5watt 5dB 3G

ATR-50NMF3-005-5

Attenuator, N(male)- N(female), power 5 Watt, frequency 3 GHz , rejection 5 db

Technical Data

Electrical Data

Impedance	50 Ω
Fr. Range	DC~3GHz
VSWR	1.22 max
Average Power	5 W
Peak Power	0.5 KW
Atten&Accuracy	5 \pm 0.3dB
Voltage rating	1000 V(rms)
Test voltage	1500 V(rms)
Contact resistance:	
Center conductor	\leq 1m Ω
Out conductor	\leq 0.2m Ω
Insulation resistance	\geq 5000M Ω

Mechanical Data

Connector Type:	N type
Weight:	80 g
Durability	500 Cycles

Environmental Data

Operating Temperature	-30 $^{\circ}$ C to +65 $^{\circ}$ C
-----------------------	--------------------------------------

Material Data


Piece Parts

	Material	
Body	Brass	White bronze 3.0 over copper 2.0
Center contact	Phosphor bronze	Silver 7.0 over copper 2.0
Scatterer	Aluminium	Passivated
Insulator	PTFE	



**RF Coaxial Attenuator: N 5watt 5dB 3G
ATR-50NMF3-005-5**

Outline drawing

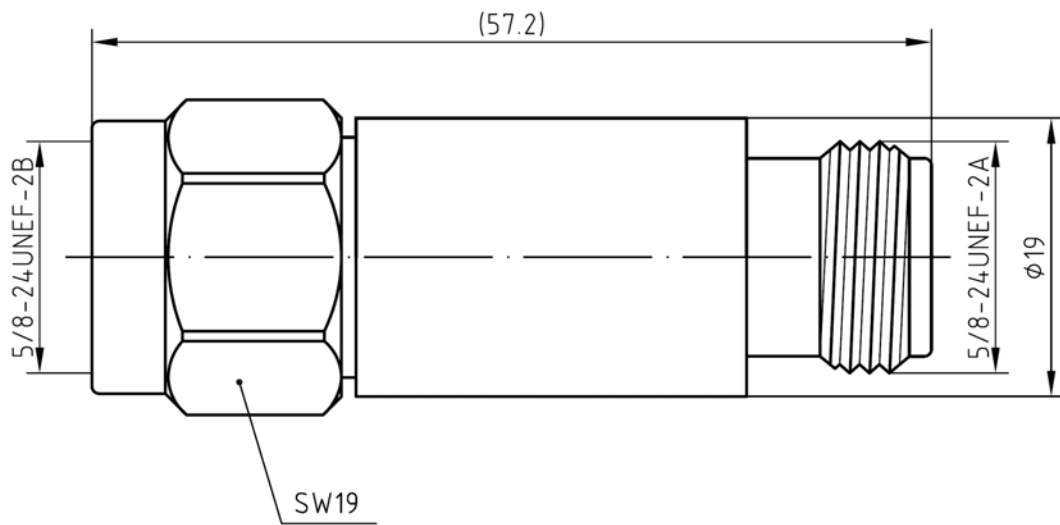

Packaging

Standard

25/Box=5 Bag

Other

Contact us