

# Attenuator

## SMA 2W 6dB 18G Attenuator, Stainless Steel, M6\*0.75


P.N. : F01-B1806-02

### Products feature


- Reliable Attenuation & V.S.W.R
- Easy maintenance
- Wide broadband frequency application
- Directional 2 watt rating

### Electrical specification

Item	Specification
Frequency Range	DC ~ 18 GHz
Impedance (Nominal)	50Ω
Average Power Rating	2 Watt
Peak Power(5 μs)	0.25 KW
Attenuation	6 dB +/- 0.8dB/max
V.S.W.R (Max)	1.30 : 1
Temperature Range	-55°C~ 85°C
Connector Type	SMA male(Input) – female(Output)
RoHS	Compliant

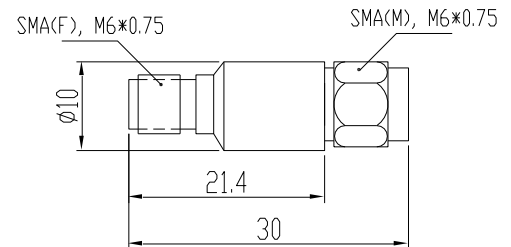

### Electrical performance

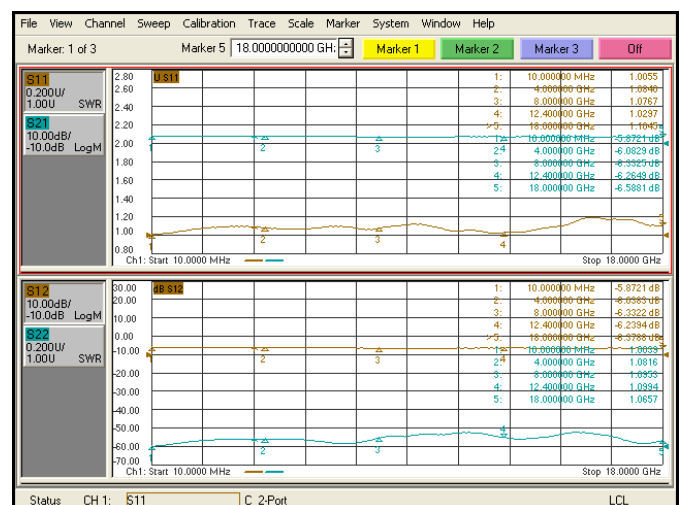

### Material specification

Item	Specification
Connector	Stainless Steel / Passivated
Body	Stainless Steel / Passivated