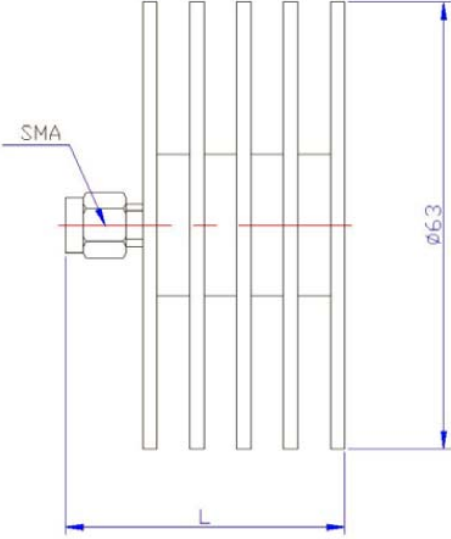


# Нагрузка коаксиальная HD-180CHPL25SJ

|   |                                  |                                       |
|---|----------------------------------|---------------------------------------|
| <b>1.0</b>  | <b>Mechanical Specifications</b> |                                       |
| 1.1   | Connector Type                   | SMA Male                              |
| 1.2   | Connectors                       | Brass Nickel Plated                   |
| 1.3   | Male Pin                         | Brass Gold Plated                     |
| 1.4   | Female Pin                       | Beryllium Copper Gold Plated          |
| 1.5   | Housing                          | Aluminum                              |
| 1.6   | Dimensions                       | Ø63×38.3 mm                           |
| 1.7   | Weight                           | 130 g                                 |
| 1.8   | Temperature Range                | -55°C - +125°C                        |
| <b>2.0 Electrical Specifications</b>  |                                  |                                       |
| 2.1   | Frequency Range                  | DC-18 GHz                             |
| 2.2   | VSWR (Max)                       | 1.30                                  |
| 2.3   | Power rating                     | Avg Power: 25 W<br>Peak Power: 0.5 kW |
| 2.4   | Input Impedance                  | 50 Ω                                  |
| <b>3.0 Outline Drawings</b>   |                                  |                                       |
|  |                                  |                                       |