

Coaxial Right Angle PCB Connector: SSMA-KWHD

Description

SSMA Right Angle jack receptacle for PCB solder legs

Interface standards

MIL-C-39012

Technical Data

Electrical Data

Impedance	50 Ω
Interface frequency max.	10 GHz
VSWR	$1.08+0.035 \times f(\text{GHz})$ max
Voltage rating	500 V(rms)
Test voltage	750 V(rms)
Contact resistance:	
Center conductor	$\leq 3\text{m} \Omega$
Out conductor	$\leq 2\text{m} \Omega$
Insulation resistance	$\geq 5000\text{M} \Omega$

Mechanical Data

Center contact retention	
Axial force – Mating end	27 N min
Axial force – Opposite end	27 N min
Torque	2.8 N.cm min
Weight	3.2 g
Durability	500 Cycles

Environmental Data

Operating Temperature	-65 °C to 165 °C
-----------------------	------------------


Material Data

Piece Parts

Body	Brass
Center contact	Beryllium copper
Insulator	PTFE


Surface Plating(μm)

Gold 0.2 over Nickel 2.0
Gold 0.5 over Nickel 2.0



Coaxial Right Angle PCB Connector: SSMA-KWHD

Outline drawing

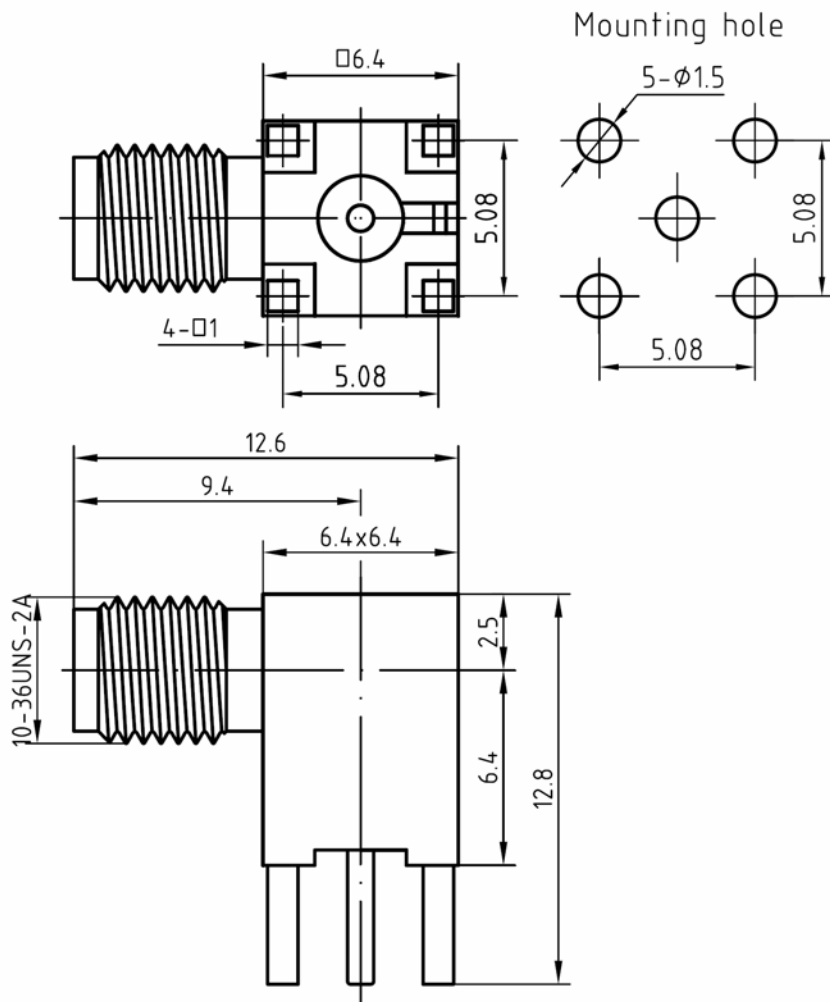

Packaging

Standard

150/Box=15Bag

Other

Contact us