


# Attenuator

## SMA 2W 1dB 18G Attenuator, Stainless Steel, M6\*0.75

P.N. : F01-B1801-02

### Products feature

- Reliable Attenuation & V.S.W.R
- Easy maintenance
- Wide broadband frequency application
- Directional 2 watt rating

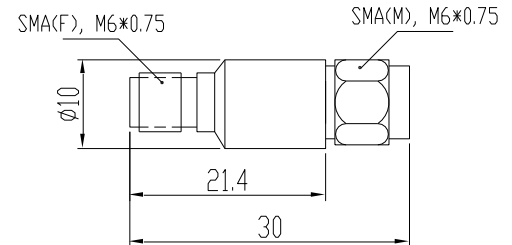

### Electrical specification

| Item                 | Specification                       |
|----------------------|-------------------------------------|
| Frequency Range      | DC ~ 18 GHz                         |
| Impedance (Nominal)  | 50Ω                                 |
| Average Power Rating | 2 Watt                              |
| Peak Power(5 μs)     | 0.25 KW                             |
| Attenuation          | 1 dB<br>+/- 0.8dB/max               |
| V.S.W.R (Max)        | 1.30 : 1                            |
| Temperature Range    | -55°C~ 85°C                         |
| Connector Type       | SMA male(Input) –<br>female(Output) |
| RoHS                 | Compliant                           |

### Material specification

| Item      | Specification                   |
|-----------|---------------------------------|
| Connector | Stainless Steel /<br>Passivated |
| Body      | Stainless Steel /<br>Passivated |

### Electrical performance

