

Coaxial Between Series Adapter: 2.4/SMP-JJL

Description

Adaptor 2.4mm plug (male) / SMP (limited detent) jack (male)

Interface standards

MIL-STD-348

Technical Data

Electrical Data

Impedance	50 Ω
Interface frequency max.	40 GHz
VSWR	1.25 max
Insert loss	≤0.04X √ f(GHz)
RF Leakage	≤-75dB
Voltage rating	350 V(rms)
Test voltage	750 V(rms)
Contact resistance:	
Center conductor	≤6 m Ω
Out conductor	≤2 m Ω
Insulation resistance	≥5000M Ω

Mechanical Data

Weight	6.05 g
Durability	2000min Cycles

Environmental Data

Operating Temperature	-55 °C to +135 °C
-----------------------	-------------------

Material Data

Piece Parts

Center contact	Brass
Outer contact	Stainless Steel
Insulator	PEI (Ultem)
Nut	Stainless steel

Material


Surface Plating(μ m)

Gold 1.27 over nickle 2.0
Passivated
Passivated



Coaxial Between Series Adapter: 2.4/SMP-JJL

Outline drawing

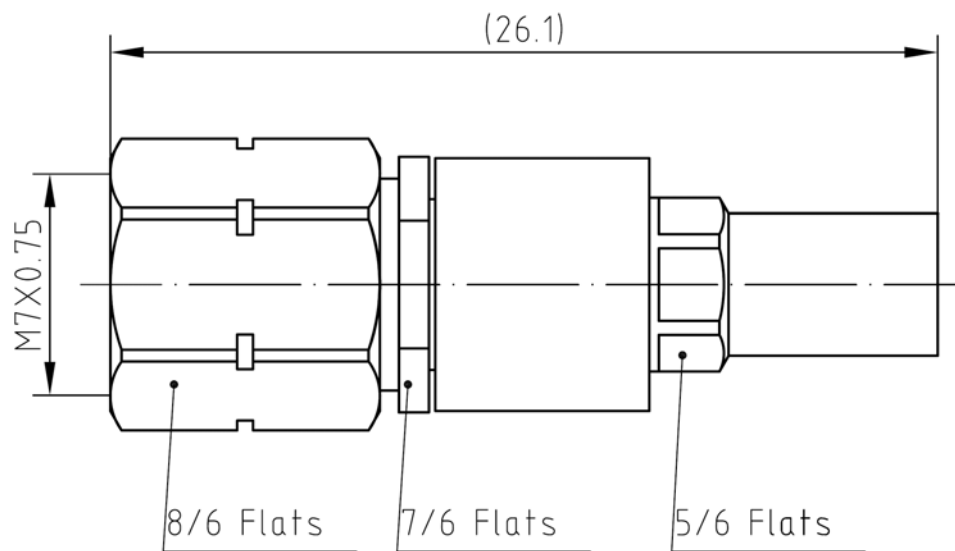

Packaging

Standard

Other

100/Box=10Bag

Contact us