


Attenuator

SMA 2W 9dB 18G Attenuator, Stainless Steel, M6*0.75

P.N. : F01-B1809-02

Products feature


- Reliable Attenuation & V.S.W.R
- Easy maintenance
- Wide broadband frequency application
- Directional 2 watt rating

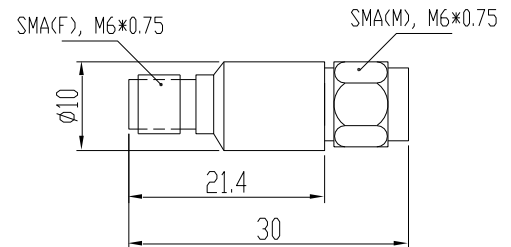

Electrical specification

Item	Specification
Frequency Range	DC ~ 18 GHz
Impedance (Nominal)	50 Ω
Average Power Rating	2 Watt
Peak Power(5 μ s)	0.25 KW
Attenuation	9 dB +/- 0.8dB/max
V.S.W.R (Max)	1.30 : 1
Temperature Range	-55 $^{\circ}$ C ~ 85 $^{\circ}$ C
Connector Type	SMA male(Input) – female(Output)
RoHS	Compliant

Electrical performance

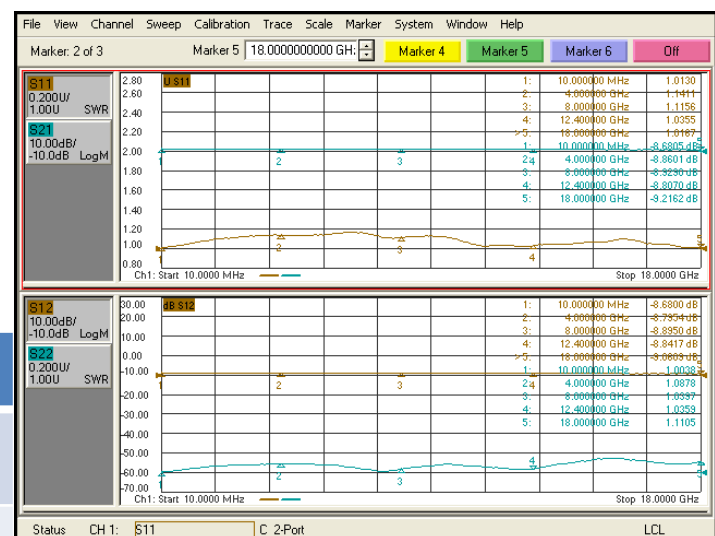

Material specification

Item	Specification
Connector	Stainless Steel / Passivated
Body	Stainless Steel / Passivated