

## Coaxial Between Series Adapter: N/BNC-75JK

### Description

Adaptor N 75Ω plug (male) / BNC 75Ω jack (female)

### Interface standards

MIL-C-39012

### Technical Data

#### Electrical Data

Impedance	75Ω
Interface frequency max.	2 GHz
VSWR	$1.08+0.05 \times f$ (GHz) max
Voltage rating	500 V(rms)
Test voltage	1500 V(rms)
Contact resistance:	
Center conductor	$\leq 1.5 \text{ m}\Omega$
Out conductor	$\leq 1 \text{ m}\Omega$
Insulation resistance	$\geq 5000 \text{ M}\Omega$

#### Mechanical Data

Weight	28 g
Durability	500 Cycles

#### Environmental Data

Operating Temperature	-65 °C to 165 °C
-----------------------	------------------

#### Material Data

##### Piece Parts


Center contact	Beryllium copper
Body	Brass
Coupling nut	Brass
Insulator	PTFE



<b>Surface Plating(μ m)</b>
Gold 0.3 over Nickel 2.0
Nickel 7.0 over copper 2.0
Nickel 7.0 over copper 2.0

## Coaxial Between Series Adapter: N/BNC-75JK

### Outline drawing

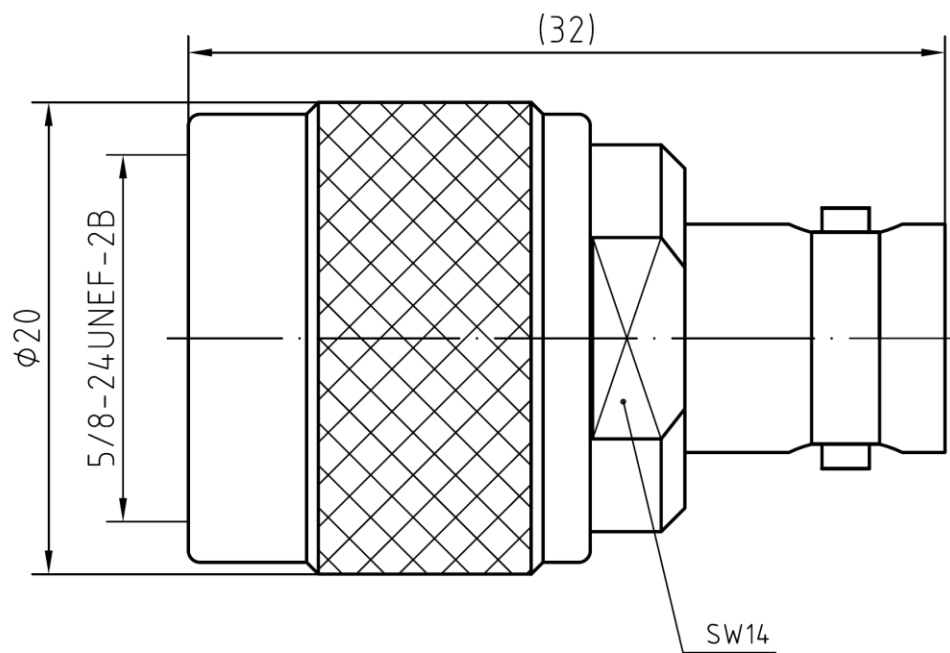

### Packaging

Standard

50/Box=5 Bag

Other

Contact us