

DATA SHEET

Coaxial 2.4mm Series Adapter: 2.4-JJ

Description

Adaptor 2.4mm plug (male) / 2.4mm plug (male)

Interface standards

MIL-STD-348

Technical Data

Electrical Data

Impedance	50 Ω
Interface frequency max.	50 GHz
VSWR	1.15max @50GHz
Insert loss	$\leq 0.04X \sqrt{f(\text{GHz})}$
RF Leakage	$\leq -100\text{dB}$
Voltage rating	350 V(rms)
Test voltage	750 V(rms)
Contact resistance:	
Center conductor	$\leq 4 \text{ m}\Omega$
Out conductor	$\leq 2.5 \text{ m}\Omega$
Insulation resistance	$\geq 5000\text{M}\Omega$

Mechanical Data

Weight	4.9 g
Durability	2000min Cycles

Environmental Data

Operating Temperature	-55 °C to +135 °C
-----------------------	-------------------

Material Data

Piece Parts

Center contact	Beryllium copper
Outer contact	Stainless Steel
Insulator	PEI (Ultem)
Body	Stainless steel
Nut	Stainless steel

Material

Surface Plating(μm)


Gold 1.27 over nickle 2.0
Passivated
Passivated
Passivated



DATA SHEET Coaxial 2.4mm

Series Adapter: 2.4-JJ

Outline drawing

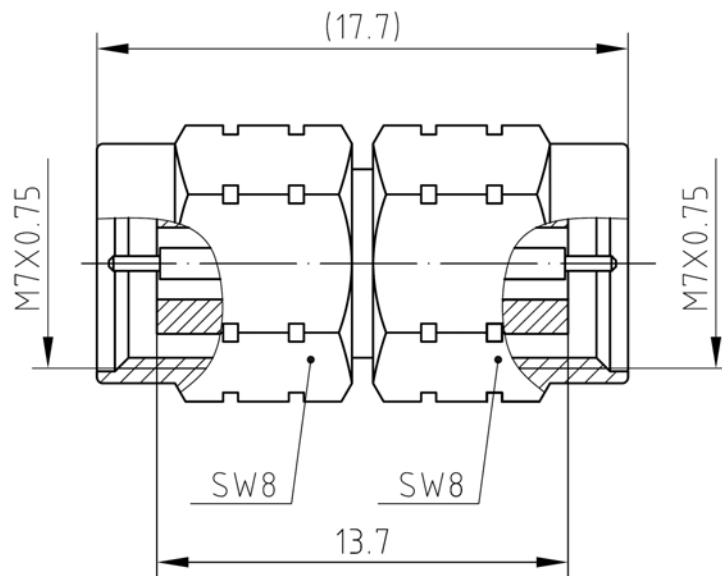

Packaging

Standard

100/Box=10Bag

Other

Contact us